BACK BAR REFRIGERATION

Introducing the revolutionary new line
of custom refrigeration from
the industry leader in **cool**

Perlick®

MEET THE NEW GENERATION OF
BACK BAR REFRIGERATION

NEW
End-wall Refrigeration Module creates 14% increased storage capacity

NEW
Tapping can be ordered for any compartment

NEW
NSF-approved for open-food storage

Refrigerant Service Valves reduce service costs

NEW
All models include state-of-the-art NSF-approved digital control *(self-contained models)*

NEW
Integrated locks for increased security

Recessed floor pan

Perlick®

NEW
Multiple door styles available:
solid, glass, sliding and drawers
(refrigerator or wine)

NEW
Choice of **Crisp White™** *or*
Cool Blue™ LED lighting

NEW
Deeper Top Wine Drawer allows
for bottles to be stored upright
(up to 30 bottles)

Anti-sweat heaters in cabinet
face prevent condensation

NEW
Lower Drawer allows for
cradled bottle storage
(up to 18 bottles)

NEW
Industry Exclusive
Refrigerator Drawers (Wine
Drawer option shown)

Multiple shelving options available,
including full-extension wine shelves

INTRODUCING ...

A NEW GENERATION OF BACK BAR EQUIPMENT FROM THE EXPERTS IN REFRIGERATION

Perlick has raised the bar yet again with our newly reengineered back bar refrigeration line up. Expertly crafted as always to deliver the quality you've come to expect from Perlick, these new models move way beyond basic with thoughtful amenities you just can't get from other back bar equipment suppliers. Each unit is fully customizable to accommodate virtually any bar configuration.

Available in single-zone, dual-zone, narrow-door, pass-thru and sliding-door back bar models, each unit starts with a base model and is designed based on your specified options. You have full control of your cabinet's look and function. The following is a step-by-step illustration on how to build a back bar to meet your every want and need.

CHOOSE YOUR MODEL
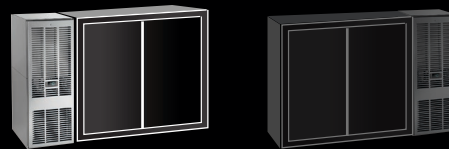**BBS60** – Self-Contained Single-zone 2-door Back Bar Refrigerator

120V	230V

1. CHOOSE VOLTAGE
- ☑ **120V**
- 230V

2. CHOOSE YOUR TEMPERATURE
- Standard Refrigerator (temp)
- ☑ **Wine Temp. Control – WHITE (temp)**
- Wine Temp. Control – RED (temp)

3. CHOOSE YOUR TOP
- ☑ **Stainless Steel**
- Laminate
- Tapping Stainless Steel

4. CONDENSING UNIT LOCATION
- ☑ **Left Position**
- Right Position

5. CHOOSE LED COLORED LIGHTS
- Crisp White™
- ☑ **Cool Blue™**

6. GRILLE FINISH (FRONT)
- Black pre-coat
- ☑ **Stainless steel**
- Laminate over black

7. COMPARTMENT ONE/TWO OPTIONS

☐ Solid Black/Field Laminate	☐ Drawers, Refrigerator Black /Field Laminate
☐ Solid Stainless	☐ Drawers, Refrigerator Stainless Steel
☐ Solid Laminate	☐ Drawers, Refrigerator Laminate
☐ Glass w/Black/ Field Laminate Frame	☐ Drawers, Wine Black/Field Laminate
✅ **Glass w/Stainless Steel Frame (L)**	✅ **Drawers, Wine Stainless Steel (R)**
☐ Glass w/Laminate Frame	☐ Drawers, Wine Laminate

8. DOOR HINGING OPTIONS

Left Compartment	*Right Compartment*
☐ None (Drawers Only)	✅ **None (Drawers Only)**
✅ **Left**	☐ Left
☐ Right	☐ Right

9. SHELVING OPTIONS

✅ **None (Drawers) (R)**
☐ Standard Wire Shelving
☐ Divider Shelving
☐ Standard Cut Out Shelves
☐ Divider Cut Out Shelves
☐ Wine Racks
✅ **Full-extension Wine Racks (L)**

10. FINISH ENDS

☐ None
☐ Laminate – Left
☐ Laminate – Right
☐ Laminate – Both
☐ Stainless Steel End Right
☐ Stainless Steel End Left
✅ **Stainless Steel End Both**

With the options chosen above, the customer would receive a 2-door, self-contained, stainless steel cabinet programmed to a single-zone white wine temperature. The left compartment is a glass door with left hinge and features five (5) full-extension wine shelves. The right compartment features wine drawers that can accommodate upright bottles and cradled bottle storage below.

BMO Harris Bradley Center   Milwaukee, Wisconsin

SINGLE-ZONE

BACK BAR REFRIGERATORS

• Available in 1-, 2-, 3- or 4-door (36", 60", 84" or 108") self-contained models or 1-, 2-, 3- or 4-door (24", 48", 72" or 96") remote models

• All models are ANSI/NSF #7 approved for open food storage and are UL listed for the U.S. and Canada

• Choice of temperature range; Refrigerator (34°F–42°F) or Wine (40°F–65°F). Factory set to approximately 38°F for Refrigerator, 45°F for White Wine and 60°F for Red Wine

• Industry Exclusive refrigerator and wine drawers available on all models (excluding 36" remote refrigerators)

• The entire back bar line can be configured to accommodate tapping

BBS84 – Wine Center with two (2) stainless steel glass doors, full-extension wine shelves and wine drawers *(shown)*

BBR48 – Refrigerator with stainless steel glass doors (2), standard wine shelves *(shown)*

SINGLE-ZONE
SELF-CONTAINED BACK BAR REFRIGERATORS

BBS36 – Wine Drawers (shown)

*BBS60 – Refrigerator with two (2) stainless steel glass doors,
standard wire shelving (shown)*

BBS36

NSF c UL us

Specifications

Exterior Length   36" (91.44 cm)
Exterior Depth   24.75" (62.87 cm)
Exterior Height   34.56" (87.78 cm)
Net Capacity   7.4 cu. ft. (209.54L)
Number of Compartments   1
Horsepower   1/5
Amps   3.2

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available   Yes
Drawers Available   Yes
Electrical Supply   120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options   **Crisp White™** *or* **Cool Blue™**

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)
Drawers, Refrigerator (black, stainless, laminate, field laminated)
Drawers, Wine (black, stainless, laminated, field laminated)

BBS60

NSF c UL us

Specifications

Exterior Length   60" (152.40 cm)
Exterior Depth   24.75" (62.87 cm)
Exterior Height   34.56" (87.78 cm)
Net Capacity   16.0 cu. ft. (453.07L)
Number of Compartments   2
Horsepower   1/4
Amps   5.5

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available   Yes
Drawers Available   Yes
Electrical Supply   120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options   **Crisp White™** *or* **Cool Blue™**

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)
Drawers, Refrigerator (black, stainless, laminate, field laminated)
Drawers, Wine (black, stainless, laminated, field laminated)

*BBS84 – Wine Center with two (2) stainless steel glass doors,
full-extension wine shelves and wine drawers (shown)*

BBS108 – Refrigerator with solid stainless doors (shown)

BBS84

NSF · c UL us

Specifications

Exterior Length 84" (213.36 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 24.8 cu. ft. (702.26L)
Number of Compartments 3
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available Yes
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)
Drawers, Refrigerator (black, stainless, laminate, field laminated)
Drawers, Wine (black, stainless, laminate, field laminated)

BBS108

NSF · c UL us

Specifications

Exterior Length 108" (274.32 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 33.5 cu. ft. (948.61L)
Number of Compartments 4
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available Yes
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminate, field laminated)
Drawers, Refrigerator (black, stainless, laminate, field laminated)
Drawers, Wine (black, stainless, laminate, field laminate)

SINGLE-ZONE
REMOTE BACK BAR REFRIGERATORS

BBR24 – Refrigerator with stainless steel glass door, standard wire shelving (shown)

BBR48 – Refrigerator with solid stainless steel doors (shown)

BBR24

NSF ⓒ Ⓤ US

Specifications

Exterior Length 24" (60.96 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 7.0 cu. ft. (198.22L)
Number of Compartments 1
Amps 1.1
Electrical Connection Hard-wired
Evaporator Capacity - Remotes 900 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

BBR48

NSF ⓒ Ⓤ US

Specifications

Exterior Length 48" (121.92 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 15.3 cu. ft. (433.25L)
Number of Compartments 2
Amps 1.6
Electrical Connection Hard-wired
Evaporator Capacity - Remotes 1900 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

*BBR72 – Refrigerator with three (3) stainless steel glass doors,
standard wire shelving (shown)*

BBR72

NSF c (UL) us

Specifications

Exterior Length 72" (182.88 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 23.9 cu. ft. (676.77L)
Number of Compartments 3
Amps 2
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2300 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230
VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

*BBR96 – Refrigerator with two (2) solid stainless doors and two (2)
stainless steel glass doors, standard wire shelving (shown)*

BBR96

NSF c (UL) us

Specifications

Exterior Length 96" (243.84 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 32.6 cu. ft. (923.13L)
Number of Compartments 4
Amps 2.5
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2300 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230
VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

WINE DRAWERS

by **Perlick®**

WINE certified

- Deeper top drawer allows for upright storage of up to 30 open bottles*

- Lower drawer offers proper storage for up to 18 cradled bottles*

- Available in red and/or white wine temperature single-zone or dual-zone models

based on 750 ml., 3-inch diameter bottles

DUAL-ZONE

BACK BAR REFRIGERATORS

- Available in 2-door (60") self-contained model

- Industry Exclusive wine drawers – Deeper top drawer allows for upright storage of open bottles. Lower drawer provides additional storage for cradled bottles.

- Industry Exclusive full-extension wine shelves with stainless steel fronts

- All models are ANSI/NSF #7 approved for open food storage and are UL listed for the U.S. and Canada.

- Choice of temperature range; Refrigerator (34°F–42°F) or Wine (40°F–65°F). Factory set to approximately 38°F for Refrigerator, 45°F for White Wine and 60°F for Red Wine

- Wine Certified wine dispensing kit available

DZS60 Dual-Zone Wine Center w/ Wine Drawers and wine dispensing *(shown)*

DZS60 Dual-Zone Wine Center with stainless steel glass door, full-extension wine shelves and Wine Drawers *(shown)*

DZS60 – Dual-Zone Refrigerator with stainless steel glass door and wine dispensing *(shown)*

DZS60

(NSF) c (UL) US

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 7.4 cu. ft. (209.54L)
Number of Compartments 2
Horsepower 1/4
Amps 5.5

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available Yes
Electrical Supply 120 VAC/60 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)
Drawers, Refrigerator (black, stainless, laminated, field laminated)
Drawers, Wine (black, stainless, laminated, field laminate)

Our thinking on **illumination** has evolved.

LED lighting is now a standard feature on all new Perlick back bar refrigerators. Available in **Crisp White™** or **Cool Blue™**, these lights provide exceptional clarity and increase the visual impact of your stocked product.

- LED lighting is 50% *more* efficient*

- LED lighting has a 20% *longer* life*

Crisp White™

Cool Blue™
(shown below)

* When compared to compact fluorescent bulbs

DUAL-ZONE WINE CENTER

INDUSTRY EXCLUSIVE Dual-zone wine center properly *stores* and *dispenses* wine.

WINE certified

DZS60 Wine Center with stainless steel glass door, full-extension shelves (left) and solid stainless door w/ single-faucet wine dispensing (right)

WINE certified

DZS60 Wine Center with Wine Drawers (left) and solid stainless door w/ single-faucet wine dispensing (right)

Now you can properly store and dispense wine at two separate temperatures in the same cabinet. Customize your dual-zone wine center with options to suit your specific needs:

• Wine drawers

• Solid doors with full-extension wine shelves

• Stainless glass doors with full-extension wine shelves

• 1-, 2-, 3-, 4- or 5-faucet wine tapping

Perlick®

18

NARROW-DOOR

BACK BAR REFRIGERATORS

- Available in 1-, 2-, 3- or 4-door (32", 52", 72" or 92") self-contained models or 2-, 3- or 4-door (40", 60" or 80") remote models

- Narrow-door unit doors are 4" narrower than the standard unit to accommodate tight working spaces behind the bar

- All models are ANSI/NSF #7 approved for open food storage and are UL listed for the U.S. and Canada.

- Choice of temperature range; Refrigerator (34°F–42°F) or Wine (40°F–65°F). Factory set to approximately 38°F for Refrigerator, 45°F for White Wine and 60°F for Red Wine

- All refrigerator cabinets can be configured to accommodate tapping

BBSN32 – Refrigerator with solid stainless door *(shown)*

BBRN80 – Refrigerator with two (2) stainless glass doors, standard wire shelving and two (2) solid stainless doors *(shown)*

NARROW-DOOR

SELF-CONTAINED BACK BAR REFRIGERATORS

BBSN32 – Refrigerator with solid stainless steel door (shown)

BBSN52 – Refrigerator with stainless steel glass doors (2), standard wire shelving (shown)

BBSN32

NSF c (UL) US

Specifications

Exterior Length 32" (81.28 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 6.0 cu. ft. (169.90 L)
Number of Compartments 1
Horsepower 1/5
Amps 3.2

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

BBSN52

NSF c (UL) US

Specifications

Exterior Length 52" (132.08 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 13.3 cu. ft. (376.61 L)
Number of Compartments 2
Horsepower 1/4
Amps 5.5

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

BBSN72 – Refrigerator with three (3) solid stainless steel glass doors (shown)

BBSN92 – Refrigerator with four (4) stainless steel glass doors (shown)

BBSN72

NSF c **UL** us

Specifications

Exterior Length 72" (182.88 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 20.6 cu. ft. (583.33 L)
Number of Compartments 3
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

BBSN92

NSF c **UL** us

Specifications

Exterior Length 92" (233.68 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 27.8 cu. ft. (787.21 L)
Number of Compartments 4
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

NARROW-DOOR
REMOTE BACK BAR REFRIGERATORS

BBRN40 – Refrigerator with two (2) stainless glass doors, standard wire shelving (shown)

BBRN60 – Refrigerator with three (3) solid stainless doors (shown)

BBRN40

NSF · c UL us

Specifications

Exterior Length 40" (101.60 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 12.0 cu. ft. (339.80 L)
Number of Compartments 2
Amps 1.6
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 1,900 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ or Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

BBRN60

NSF · c UL us

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 19.0 cu. ft. (538.02 L)
Number of Compartments 3
Amps 1.6
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2,300 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ or Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminate, field laminated)

BBRN80 – Refrigerator with two (2) stainless steel glass doors and two (2) solid stainless steel doors (shown)

BBRN80

NSF c UL us

Specifications

Exterior Length 80" (203.20 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 26.8 cu. ft. (758.89 L)
Number of Compartments 4
Amps 2.5
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2,300 Btu/Hr*

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ or Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

WHAT IS END-WALL REFRIGERATION?

Perlick's redesigned back bar refrigerators feature end-wall refrigeration, which **increases cabinet capacity by 14%**. All of the refrigeration components are confined to one compact module, which can be ordered with **left or right placement on the cabinet**. Should you need service or replacement, you'll save money by having the **ability to repair or replace just the module**.

23

From the leaders in wine storage and dispensing ...

Perlick® WINE DISPENSING GUIDE
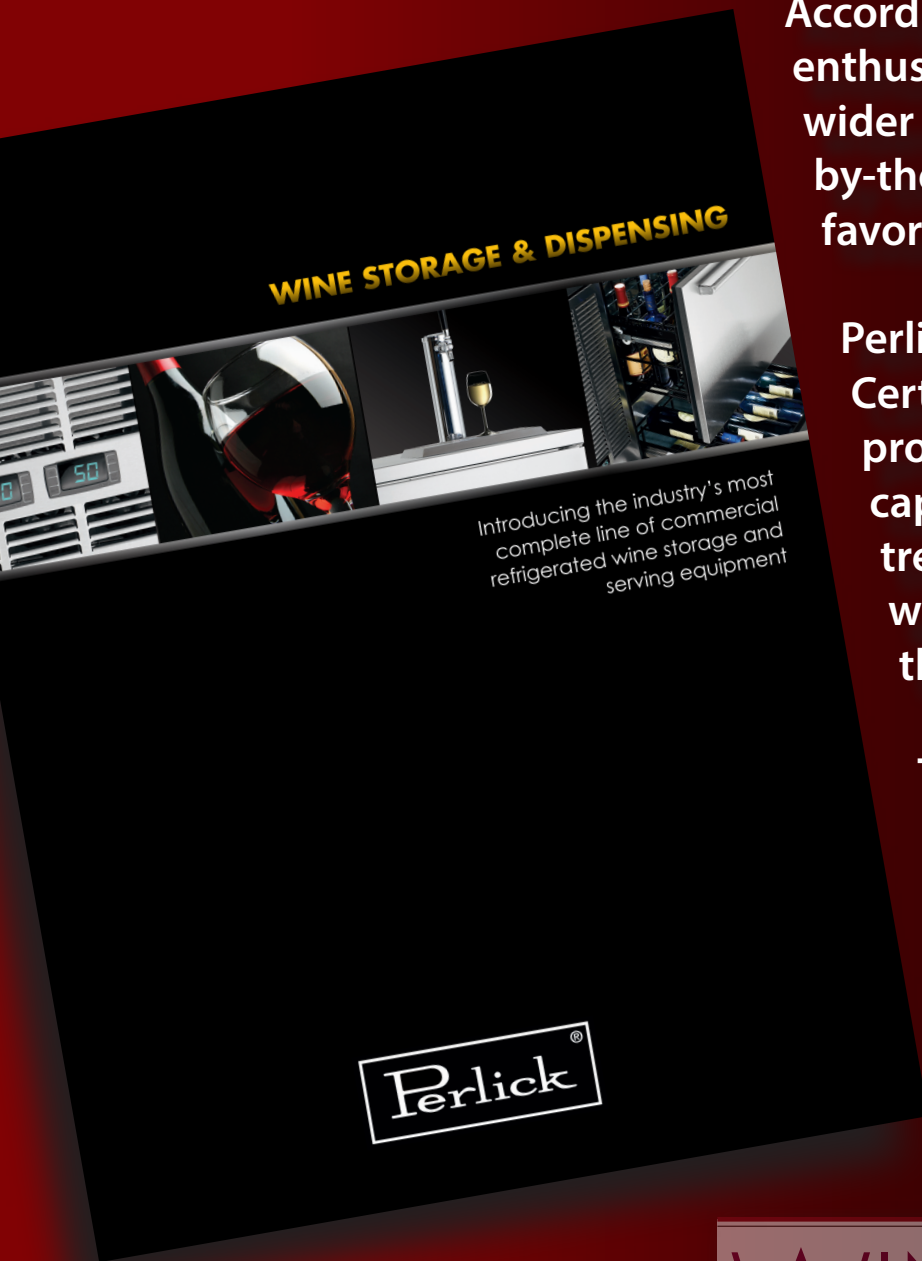
According to experts, wine enthusiasts are demanding a wider variety of high-end, wine-by-the-glass choices from their favorite bars and restaurants.

Perlick's lineup of Wine Certified storage and serving products will help you capitalize on this growing trend in unique ways you won't see anywhere else in the industry.

To learn more, check out our new Wine Storage and Dispensing Guide to see our entire line of Wine Certifed products. Visit *perlick.com* to download a copy today.

WINE STORAGE & DISPENSING

Introducing the industry's most complete line of commercial refrigerated wine storage and serving equipment

Perlick®

WINE certified

SLIDING DOOR

BACK BAR REFRIGERATORS

- Available in 2- or 4-door (60" or 108") self-contained models or 2- or 4-door (48" or 96") remote models.

- Also available in pass-thru models (60" self-contained and 48" remote); see pages 31 and 33 for more information.

- Sliding doors are self-closing, and can be propped open for easy stocking

- All models are ANSI/NSF #7 approved for open food storage and are UL listed for the U.S. and Canada

- Choice of temperature range; Refrigerator (34°F–42°F) or Wine (40°F–65°F). Factory set to approximately 38°F for Refrigerator, 45°F for White Wine and 60°F for Red Wine

SDBS108 – Refrigerator with four (4) glass sliding doors, standard wire shelving *(shown)*

SDBR48 – Refrigerator with two (2) glass sliding doors, standard wire shelving *(shown)*

SLIDING DOOR
SELF-CONTAINED BACK BAR REFRIGERATORS

SDBS60 – Refrigerator with two (2) glass sliding doors, standard wire shelving (shown)

*SDBS108 – Refrigerator with two (2) glass sliding doors, standard wire shelving (shown with **Cool Blue™** LED lighting)*

SDBS60

NSF · c UL us

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 14.8 cu. ft. (419.09 L)
Number of Compartments 2
Horsepower 1/4
Amps 5.5

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

SDBS108

NSF · c UL us

Specifications

Exterior Length 108" (274.32 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 30.9 cu. ft. (874.99 L)
Number of Compartments 4
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

SDBR48 – Refrigerator with two (2) glass sliding doors, standard wire shelving (shown)

SDBR96 – Refrigerator with four (4) glass sliding doors, standard wire shelving (shown)

SDBR48

Specifications

Exterior Length 48" (121.92 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 14.8 cu. ft. (419.09 L)
Number of Compartments 2
Amps 2
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2,300 Btu/Hr*

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

SDBR96

Specifications

Exterior Length 96" (243.84 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 30.9 cu. ft. (874.99 L)
Number of Compartments 4
Amps 2
Electrical Connection Hard wired
Evaporator Capacity – Remotes 2,300 Btu/Hr*

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

Sliding Door Back Bar Refrigerators

NSF APPROVED
for open-food storage

Perlick's entire line of back bar refrigerators
are NSF approved for open-food storage.

PASS-THRU

BACK BAR REFRIGERATORS

- Provides easy access from both sides and are offered in glass swing door or sliding doors

- Doors on Sliding Door Pass-Thru models are self-closing and can be propped open for easy stocking

- All models are ANSI/NSF #7 approved for open-food storage and are UL listed for the U.S. and Canada

- Choice of temperature range; Refrigerator (34°F–42°F) or Wine (40°F–65°F). Factory set to approximately 38°F for Refrigerator, 45°F for White Wine and 60°F for Red Wine

PTS84 – Refrigerator with three (3) stainless steel glass doors, standard wire shelving *(shown)*

SDPR48 – Refrigerator with two (2) glass sliding doors (per side), standard wire shelving *(shown)*

PASS-THRU

SELF-CONTAINED BACK BAR REFRIGERATORS

*PTS36 – Refrigerator with stainless steel glass door,
standard wire shelving (shown)*

*PTS60 – Refrigerator with two (2) stainless steel glass doors,
standard wire shelving (shown)*

PTS36   NSF · c UL us

Specifications

Exterior Length 36" (91.44 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 8.0 cu. ft. (226.53 L)
Number of Compartments 2
Horsepower 1/5
Amps 3.2

🔌 NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

PTS60   NSF · c UL us

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 17.4 cu. ft. (492.71 L)
Number of Compartments 4
Horsepower 1/4
Amps 5.5

🔌 NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

PTS84 – Refrigerator with two (2) stainless steel glass doors, standard wire shelving (shown)

SDPS60 – Refrigerator with glass sliding doors (per side), standard wire shelving (shown)

PTS84

NSF · c (UL) us

Specifications

Exterior Length 84" (213.36 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 26.7 cu. ft. (756.06 L)
Number of Compartments 6
Horsepower 1/3
Amps 6.3

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available Yes
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

SDPS60

NSF · c (UL) us

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 14.8 cu. ft. (419.09 L)
Number of Compartments 2
Horsepower 1/4
Amps 5.5

NEMA 5-15 Cord Plug Type (8' length)

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph *or* 230 VAC/50 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

PASS-THRU

REMOTE BACK BAR REFRIGERATORS

PTR48 – Refrigerator with two (2) stainless steel glass doors (per side), standard wire shelving (shown)

PTR72 – Refrigerator with three (3) stainless steel glass doors (per side), standard wire shelving (shown)

PTR48

NSF · C (UL) US

Specifications

Exterior Length 48" (121.92 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 16.6 cu. ft. (470.06 L)
Number of Compartments 4
Amps 1.6
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 1,900 Btu/Hr*

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

PTR72

NSF · C (UL) US

Specifications

Exterior Length 72" (182.88 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 25.7 cu. ft. (727.74 L)
Number of Compartments 6
Amps 2
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 2,300 Btu/Hr*

Options

Tapping Available Yes (Right Compartment Only)
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph
LED Light Options Crisp White™ *or* Cool Blue™

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

SDPR48 – Refrigerator with two (2) glass sliding doors (per side), standard wire shelving (shown)

SDPR48

NSF c (UL) us

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 14.8 cu. ft. (419.09 L)
Number of Compartments 2
Amps 1.6
Electrical Connection Hard-wired
Evaporator Capacity – Remotes 1,900 Btu/Hr*

Options

Tapping Available No
Drawers Available No
Electrical Supply 120 VAC/60 Hz/1 Ph
LED Light Options **Crisp White™** *or* **Cool Blue™**

Perlick was voted Best in Class by Consultants for 2012 by *FES Magazine*.

Visit perlick.com to see for yourself why the best in the industry prefer Perlick.

Pass-Thru Back Bar Refrigerators

33

DRY STORAGE – STANDARD DOOR

DB24 – Drawers (shown)

DB72 – 3-door (shown)

DB48 – 2-door (shown)

DB96 – 4-door (shown)

DB24

NSF c UL us

Specifications

Exterior Length 24" (60.96 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 7.4 cu. ft. (209.54 L)
Number of Compartments 1

DB72

NSF c UL us

Specifications

Exterior Length 72" (182.88 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 23.9 cu. ft. (676.77 L)
Number of Compartments 3

DB48

NSF c UL us

Specifications

Exterior Length 48" (121.92 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 15.3 cu. ft. (433.25 L)
Number of Compartments 2

DB96

NSF c UL us

Specifications

Exterior Length 96" (243.84 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 32.6 cu. ft. (923.13 L)
Number of Compartments 4

ALL MODELS

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)
Drawers, Refrigerator (black, stainless, laminated, field laminated)
Drawers, Wine (black, stainless, laminated, field laminated)

DBN20 – Single-door (shown)

DBN60 – 3-door (shown)

DBN40 – 2-door (shown)

DBN80 – 4-door (shown)

DBN20

Specifications

Exterior Length 20" (50.80 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 5.0 cu. ft. (141.58 L)
Number of Compartments 1

DBN60

Specifications

Exterior Length 60" (152.40 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 19.0 cu. ft. (538.02 L)
Number of Compartments 3

DBN40

Specifications

Exterior Length 40" (101.60 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 12.0 cu. ft. (339.80 L)
Number of Compartments 2

DBN80

Specifications

Exterior Length 80" (203.20 cm)
Exterior Depth 24.75" (62.87 cm)
Exterior Height 34.56" (87.78 cm)
Net Capacity 26.0 cu. ft. (736.24 L)
Number of Compartments 4

ALL MODELS

Door Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminate, field laminated)

Dry Storage

DRY STORAGE – PASS-THRU

DBP24 – (shown)

DBP48 – 2-door (shown)

DBP72 – 3-door (shown)

DBP24

Specifications

Exterior Length   24" (60.96 cm)
Exterior Depth   24.75" (62.87 cm)
Exterior Height   34.56" (87.78 cm)
Net Capacity   7.4 cu. ft. (209.54 L)
Number of Compartments   1

DBP72

Specifications

Exterior Length   72" (182.88 cm)
Exterior Depth   24.75" (62.87 cm)
Exterior Height   34.56" (87.78 cm)
Net Capacity   23.9 cu. ft. (676.77 L)
Number of Compartments   3

DBP48

Specifications

Exterior Length   48" (121.92 cm)
Exterior Depth   24.75" (62.87 cm)
Exterior Height   34.56" (87.78 cm)
Net Capacity   15.3 cu. ft. (433.25 L)
Number of Compartments   2

ALL MODELS

Door / Drawer Options

Solid (black, stainless, laminated, field laminated)
Glass (black, stainless, laminated, field laminated)

Did you know there are

4.7 BILLION

ways to configure the new line of **Perlick**® refrigerated back bars?

OPTIONS & ACCESSORIES
GALLERY

Perlick's new line of back bar products puts you in full control by offering a multitude of options and accessories to tailor every model to your specific needs. Please refer to your models accessory grid located on pages 40-43 to see which options and accessories are available for your specific unit.

Please refer to the following pages for each category:

DOOR FINISH OPTIONS

Stainless Steel*

Black Vinyl Clad*/
Field Laminated*

Laminated over
Black Vinyl* *(shown
with custom laminate)*

Laminated*
*(shown with custom
laminate)*

*options also available for glass door units
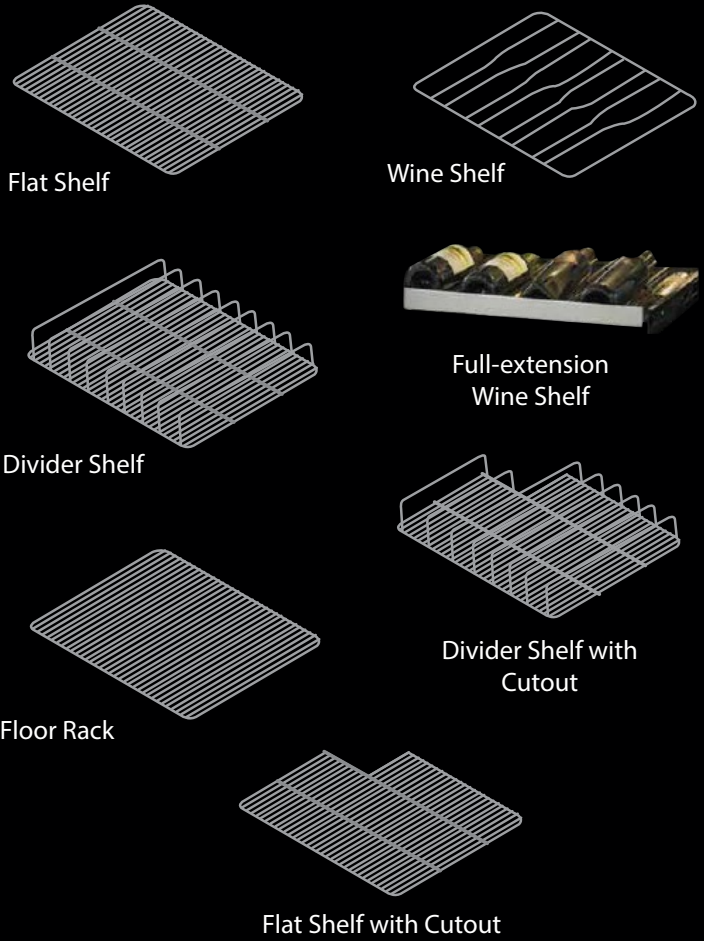
DRAWER FINISH OPTIONS

Stainless Steel

Black Vinyl Clad/
Field Laminated

Laminated
*(shown with custom
laminate)*

24" Full-length – Stainless

12" Stainless

Classic 6" Chrome
w/Black Grip

Tab Style, top
mount, stainless

Flat Shelf

Wine Shelf

Divider Shelf

Full-extension
Wine Shelf

Floor Rack

Divider Shelf with
Cutout

Flat Shelf with Cutout

Legs
*(available in adjustable
4"-5", 6"-7 1/4" or 6"-9"
models)*

Casters
*(available in 2 7/8",
3 3/4" or 6 1/8" sizes)*

Low-Profile Rollers
(1.625")

Draft Arm
(Stainless Steel or
Tarnish-free Brass
with 1, 2 or 3 faucets)

Tee-Tower
(Stainless Steel or Tar-
nish-free Brass with 2,
3, 4 or 5 faucets)

Napoli
(2-faucet in Chrome
or Tarnish-free Brass)

Lucky
(Chrome or Gold
with 1, 2 or 3 faucets)

Panther
(3-faucet in Chrome
or Gold)

Whether it's a 50s-inspired diner or your favorite breed of dog, you can customize any Perlick back bar with laminate to reflect your style, design or brand. Choose from thousands of colors and patterns from the industry's top laminate manufacturers.

Abet • Arborite • Arpa • Chemetal • Formica • Laminart
Nevamar • Octolam • Pionite • Wilson Art